

 **First in Quality. Built to Last.**



L-SEALERS

PROFESSIONAL SERIES

MODELS

EM2016T(K), EM2028T(K), EM2040T(K), EM2050T(K), EM2070TK, EM2080TK, EM20100TK, EM3040T(K), EM3050T(K), EM3070TK, EM3080TK, EM30100TK, EM4040T(K), EM4050T(K), EM4070TK, EM4080TK, EM40100TK, EM5050TK, EM5070TK, EM5080TK, EM50100TK

DURABILITY THAT CAN'T BE MATCHED

EASTY's Professional Series L-Sealers provide top of the line features and the most robust L-Sealer design on the market today. Expertly welded from ¼" cold rolled steel, EASTY Professional L-Sealers will withstand even the most abusive real world sealing applications. As a measure of strength, EASTY L-Sealers weigh nearly twice as much as competitive models.

PROVEN RELIABILITY FOR YOUR NEEDS

Easty L-Sealers are designed and built to give you all the performance features needed for positive sealing a wide variety of films including polyolefin, polyethylene, and PVC. Cast seal arms, stainless steel film clamps, and heavy-duty magnet clamping are just some of the features that provide the durability you have come to rely on from EASTY. See for yourself why EASTY has been a leader in the shrink packaging industry for over 25 years.

EVERLASTING SEMI-AUTOMATIC L-SEALING



EASTY Professional Series L-Sealers are the ultimate workhorse for your most abusive sealing applications.

STANDARD FEATURES



- Designed to seal most polyolefin, polyethylene, and PVC* shrink films
- All-welded main frame from ¼" cold rolled steel
- Built-in drawer for tools or spare parts
- Seal head casting equipped with head return cylinder
- Stainless steel film clamps hold film in place while sealing
- Available with hot wire or hot knife seal systems
- Hot knife seal systems available with mushroom (standard), pancake, or arrow inserts
- Dual locking magnet clamps apply even pressure across sealbar
- Adjustable dwell time for better seal control
- Solid state temperature control adjustable for a variety of films*
- Adjustable product tray accommodates wide variety of product sizes
- Takeaway conveyor can be raised or lowered to center-seal product
- Automatic takeaway conveyor
- Heavy duty film cradle allows for easy changeovers and adjustments
- Adjustable pin perforator provides air evacuation
- Side seal size from 20" - 50"; front seal size from 16" - 100"
- Maximum film width up to 44"
- Maximum film roll OD up to 12"; 10" with power unwind
- Custom two-part epoxy finish resists scratching
- Heavy duty casters for transportation within plant
- Available in 110v, 220v, or optional 480v
- Easy to use design requires minimal training and maintenance
- Made in the USA

* With Hot knife systems only

STANDARD FEATURES

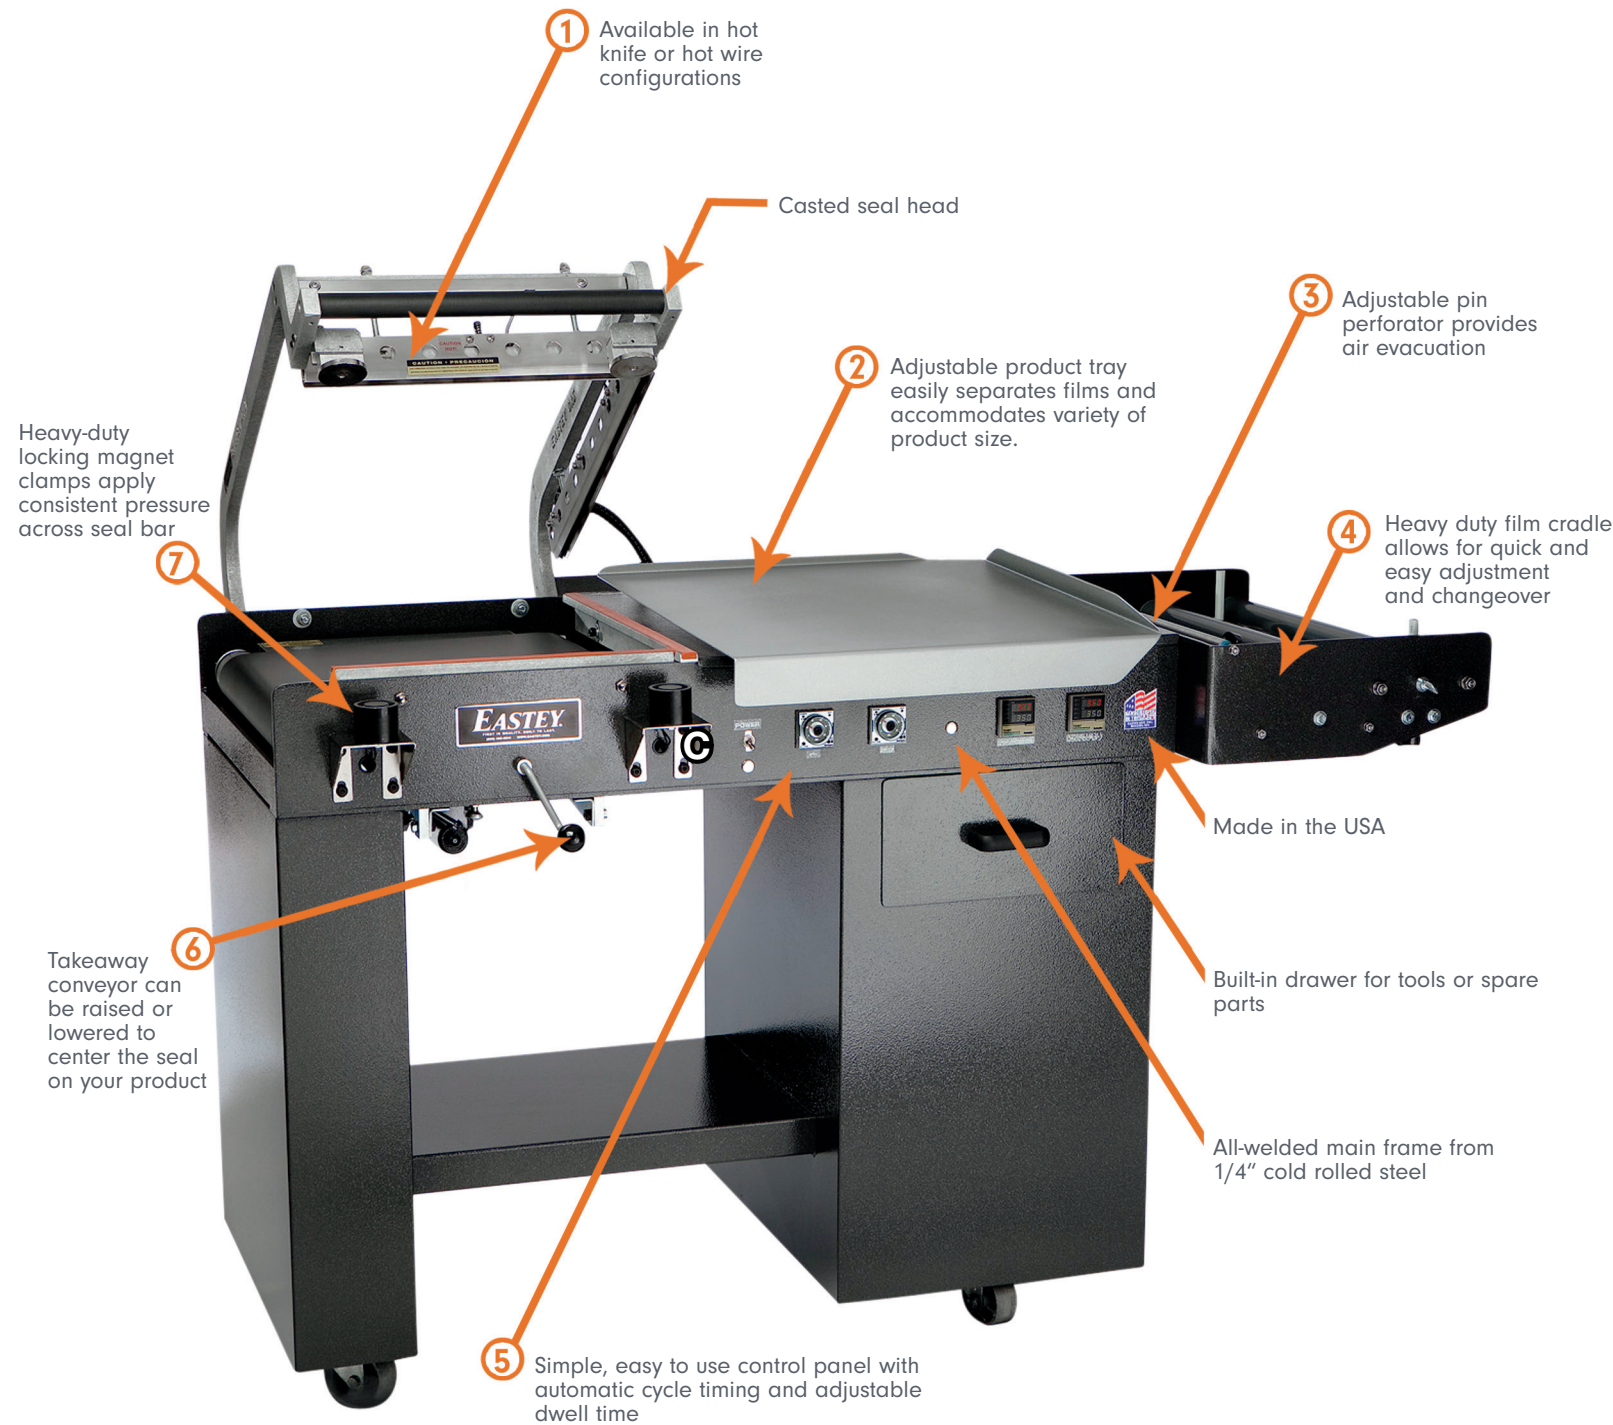

OPTIONAL ACCESSORIES

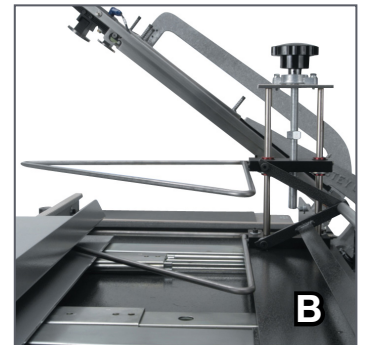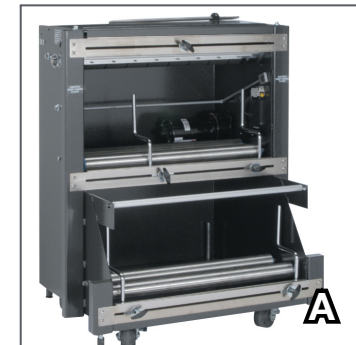

- A **Power film unwind**
Allows free feeding of film increasing operator efficiency.
- B **Film Inverter**
Inverting head allows the film to come off the back of machine. This pre-opens the film and minimizes operator effort which in turn increases output.
- C **Hot Knife Inserts**
Hot knife inserts available in Mushroom, Pancake, or Arrow styles.
- D **Stainless Steel and Left Hand Models Available**
- E **DuoSeal Continuously Heated Seal Bar**
- F **Lower Conveyor**
- G **Customer Product Guides and/or Product Tray**

L-SEALERS
PROFESSIONAL SERIES

L-SEALERS PROFESSIONAL SERIES

| MODEL NUMBER | SEAL DIMENSIONS | | MACHINE DIMENSIONS | | | STANDARD POWER | | | WEIGHT | SHP WT. |
|--------------|-----------------|---------------|--------------------|---------------|----------------|----------------|-------|-------|---------------------|---------------------|
| | FRONT | SIDE | WIDTH | HEIGHT | LENGTH | VOLTS | AMPS | PHASE | | |
| EM2016T(K) | 16" 41 cm | 20" 51 cm | 34" 86 cm | 44" 112 cm | 63" 160 cm | 220/110 | 10/20 | 1 | 600 lbs 272 kg | 700 lbs 317 kg |
| EM2028T(K) | 28" 71 cm | 20" 51 cm | 34" 86 cm | 44" 112 cm | 84" 213 cm | 220/110 | 10/20 | 1 | 700 lbs 317 kg | 800 lbs 362 kg |
| EM2040T(K) | 40" 102 cm | 20" 51 cm | 34" 86 cm | 44" 112 cm | 106" 269 cm | 220 | 15 | 1 | 800 lbs 362 kg | 900 lbs 408 kg |
| EM2050T(K) | 50" 127 cm | 20" 51 cm | 34" 86 cm | 44" 112 cm | 126" 320 cm | 220 | 20 | 1 | 900 lbs 408 kg | 1000 lbs 453 kg |
| EM2070TK | 70" 178 cm | 20" 51 cm | 34" 86.36 | 44" 112 cm | 167" 424 cm | 220 | 25 | 1 | 1300 lbs 589 kg | 1400 lbs 635 kg |
| EM2080TK | 80" 203 cm | 20" 50 cm | 34" 86 cm | 44" 112 cm | 187" 474 cm | 220 | 20 | 1 | 1500 lbs 680 kg | 1600 lbs 725 kg |
| EM20100TK | 100" 254 cm | 20" 50 cm | 34" 86 cm | 44" 112 cm | 227" 577 cm | 220 | 20 | 1 | 1900 lbs 861 kg | 2000 lbs 907 kg |
| EM3040T(K) | 40" 101.60 | 30" 76.20 | 43" 109 cm | 44" 112 cm | 106" 269 cm | 220 | 20 | 1 | 1200 lbs 544 kg | 1300 lbs 591 kg |
| EM3050T(K) | 50" 127 cm | 30" 76 cm | 43" 109 cm | 44" 112 cm | 126" 320.04 | 220 | 20 | 1 | 1300 lbs 591 kg | 1400 lbs 637 kg |
| EM3070TK | 70" 177 cm | 30" 76 cm | 43" 109 cm | 44" 112 cm | 167" 424 cm | 220 | 25 | 1 | 1600 lbs 728 kg | 1700 lbs 774 kg |
| EM3080TK | 80" 203 cm | 30" 76 cm | 43" 109 cm | 44" 112 cm | 187" 474 cm | 220 | 25 | 1 | 1800 lbs 819 kg | 1900 lbs 861 kg |
| EM30100TK | 100" 254 cm | 30" 76 cm | 43" 109 cm | 44" 112 cm | 227" 577 cm | 220 | 25 | 1 | 2100 lbs 956 kg | 2200 lbs 997 kg |
| EM4040T(K)* | 40" 101 cm | 40" 101 cm | 53" 135 cm | 44" 112 cm | 106" 269 cm | 220 | 20 | 1 | 1700 lbs 774 kg | 1800 lbs 819 kg |
| EM4050T(K)* | 50" 127 cm | 40" 101 cm | 53" 135 cm | 44" 112 cm | 126" 320 cm | 220 | 20 | 1 | 1900 lbs 861 kg | 2000 lbs 907 kg |
| EM4070TK* | 70" 177 cm | 40" 101 cm | 53" 135 cm | 44" 112 cm | 167" 424 cm | 220 | 25 | 1 | 2100 lbs 956 kg | 2200 lbs 997 kg |
| EM4080TK* | 80" 203 cm | 40" 101 cm | 53" 135 cm | 44" 112 cm | 187" 474 cm | 220 | 25 | 1 | 2300 lbs 1043 kg | 2400 lbs 1092 kg |
| EM40100TK* | 100" 254 cm | 40" 101 cm | 53" 135 cm | 44" 112 cm | 227" 577 cm | 220 | 25 | 1 | 2600 lbs 1179 kg | 2700 lbs 1229 kg |
| EM5050TK* | 50" 127 cm | 50" 127 cm | 63" 160 cm | 44" 112 cm | 126" 320 cm | 220 | 20 | 1 | 1900 lbs 861 kg | 2000 lbs 907 kg |
| EM5070TK* | 70" 177 cm | 50" 127 cm | 63" 160 cm | 44" 112 cm | 167" 424 cm | 220 | 25 | 1 | 2100 lbs 956 kg | 2200 lbs 997 kg |
| EM5080TK* | 80" 203 cm | 50" 127 cm | 63" 160 cm | 44" 112 cm | 187" 474 cm | 220 | 25 | 1 | 2300 lbs 1043 kg | 2400 lbs 1092 kg |
| EM50100TK* | 100 254.00 | 50" 127 cm | 63" 160 cm | 44" 112 cm | 227" 577 cm | 220 | 25 | 1 | 2600 lbs 1179 kg | 2700 lbs 1229 kg |

* Powered film unwind included



7041 Boone Avenue North, Brooklyn Park, MN 55428
 (763) 428-4846 1 (800) 835-9344
 www.eastey.com info@eastey.com



ENGAGE technologies corporation